

# LED LAMP


## E5 SERIES

### SLIM DOWNLIGHT

www.aigostar.com



#### ◆INSTALLATION DIAGRAM

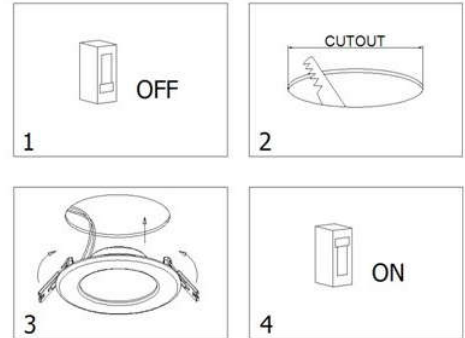

<b>V</b>	220-240V
	30000H
<b>Ra</b>	≥ 80
<b>PF</b>	> 0.9
<b>IP</b>	20


On/Off	≥20,000
	100°
<b>Hg</b>	<0.1%
<b>EEI</b>	A+
	optimal Ta=-20°~40°

**DAY LIGHT** 6000K **NATURAL WHITE** 4000K **WARM WHITE** 3000K


PACKING 1pc/colour box

#### Size


E5 DL02 6W




E5 DL02 12W



E5 DL02 18W



E5 DL02 20W



product code	Model	K	W	LM	mA	Chip QTY	PCS CTN	kWh/1000h	Certification
182458	E5 DL02 6W	6000K	6	460	190	36	60	6	CE, ROHS
000645	E5 DL02 6W	4000K	6	440	190	36	60	6	CE, ROHS
182540	E5 DL02 6W	3000K	6	420	190	36	60	6	CE, ROHS
175429	E5 DL02 12W	6000K	12	860	190	66	40	12	CE, ROHS
000652	E5 DL02 12W	4000K	12	830	190	66	40	12	CE, ROHS
182403	E5 DL02 12W	3000K	12	750	190	66	40	12	CE, ROHS
182441	E5 DL02 18W	6000K	18	1450	300	108	40	18	CE, ROHS
000669	E5 DL02 18W	4000K	18	1350	300	108	40	18	CE, ROHS
182533	E5 DL02 18W	3000k	18	1300	300	108	40	18	CE, ROHS
175443	E5 DL02 20W	6000K	20	1650	320	120	10	20	CE, ROHS
000676	E5 DL02 20W	4000K	20	1550	320	120	10	20	CE, ROHS
182427	E5 DL02 20W	3000k	20	1450	320	120	10	20	CE, ROHS



#### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

# LED LAMP

## E5 SERIES



### SLIM DOWNLIGHT

www.aigostar.com





## SPECTRUM >>>



E5 DL02 6W 6000K

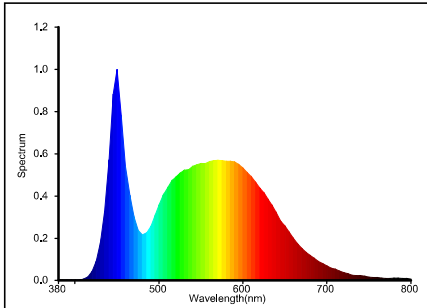



E5 DL02 6W 4000K

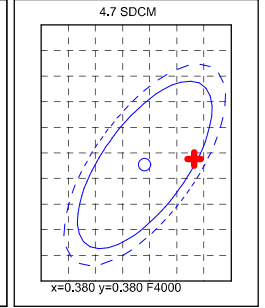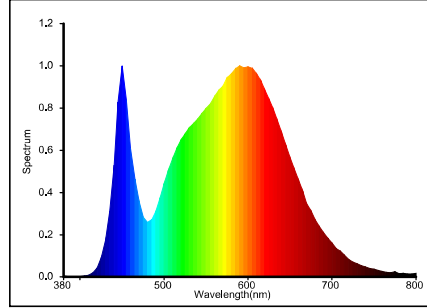



E5 DL02 6W 3000K

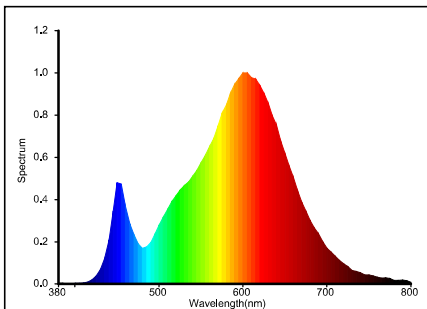



E5 DL02 12W 6000K

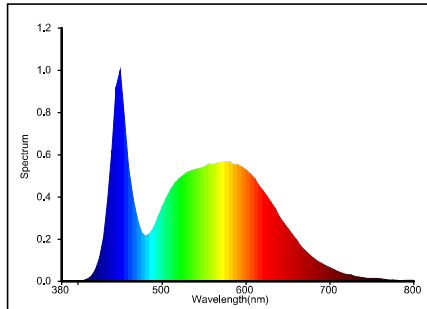



E5 DL02 12W 4000K

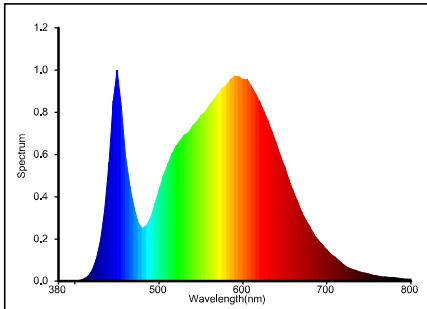



E5 DL02 12W 3000K

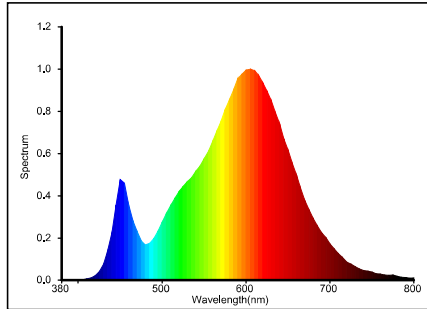

E5 DL02 18W 6000K

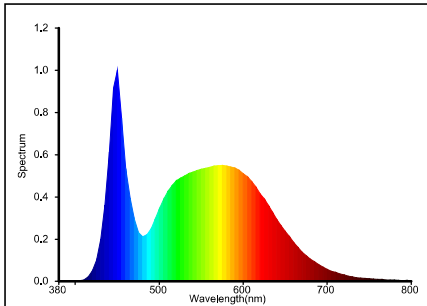

E5 DL02 18W 4000K

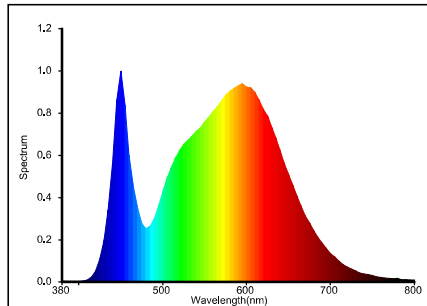

### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

# LED LAMP

## E5 SERIES



### SLIM DOWNLIGHT

www.aigostar.com





## SPECTRUM >>>



E5 DL02 18W 3000K

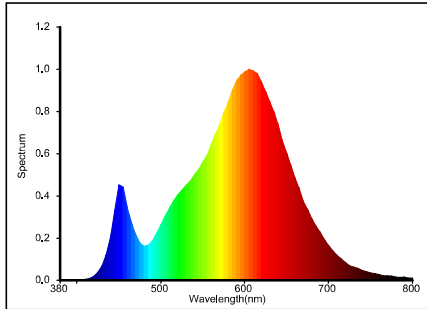



E5 DL02 20W 6000K

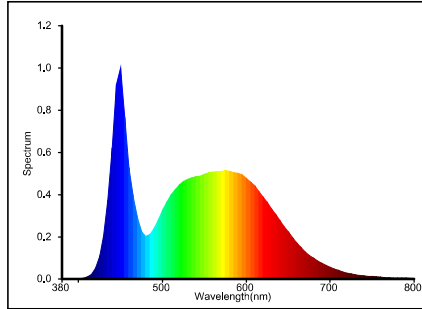

E5 DL02 20W 4000K

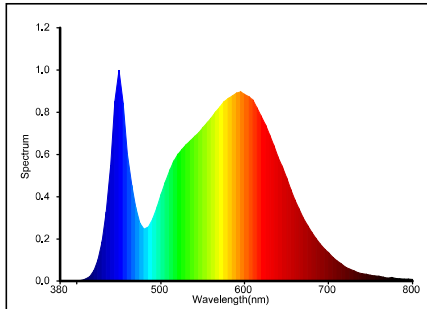

E5 DL02 20W 3000K

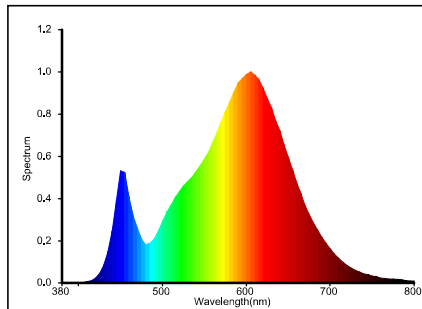

#### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.