

LED LAMP

E6 SERIES



SLIM DOWNLIGHT

www.aigostar.com



WHITE

◆INSTALLATION DIAGRAM

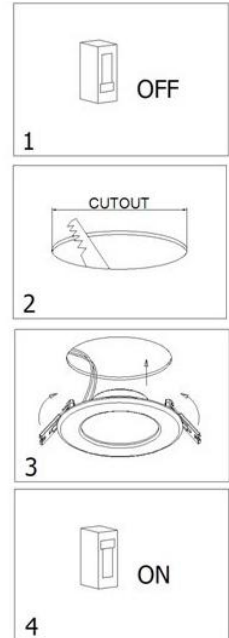

V	170-250V 50Hz
	20000H
Ra	≥ 80
PF	> 0.5
IP	20


	160°
Hg	<0.1%
EEI	A+ / A
	optimal Ta=-20°~40°

DAY LIGHT **6000K** **NATURAL WHITE** **4000K** **WARM WHITE** **3000K**


PACKING 1pc/colour box

Size

E6 SLIM DOWN LIGHT 6-9W

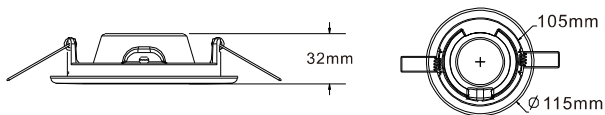

E6 SLIM DOWN LIGHT 12W

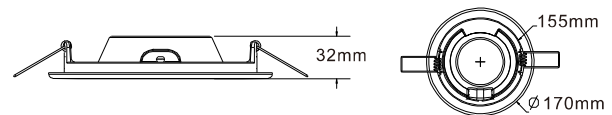

product code	Model	K	W	LM	mA	Chip QTY	PCS CTN	kWh/1000h	Certification
001338	E6 SLIM DOWN LIGHT	6000K	6	360	60	36	40	6	CE, ROHS
001352	E6 SLIM DOWN LIGHT	4000K	6	335	60	36	40	6	CE, ROHS
001345	E6 SLIM DOWN LIGHT	3000K	6	320	60	36	40	6	CE, ROHS
001147	E6 SLIM DOWN LIGHT	6000K	9	520	120	46	40	9	CE, ROHS
001130	E6 SLIM DOWN LIGHT	4000K	9	480	120	46	40	9	CE, ROHS
001123	E6 SLIM DOWN LIGHT	3000K	9	470	120	46	40	9	CE, ROHS
001390	E6 SLIM DOWN LIGHT	6000K	12	820	120	60	40	12	CE, ROHS
001413	E6 SLIM DOWN LIGHT	4000K	12	780	120	60	40	12	CE, ROHS
001406	E6 SLIM DOWN LIGHT	3000K	12	770	120	60	40	12	CE, ROHS



warning

- ◆Power should be cut off before installation, maintenance or inspection.
- ◆Please install and use the light strictly according to the instruction.
- ◆Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

