

# LED LAMP

## E6 SERIES


### SLIM DOWNLIGHT

www.aigostar.com



WHITE

#### ◆INSTALLATION DIAGRAM

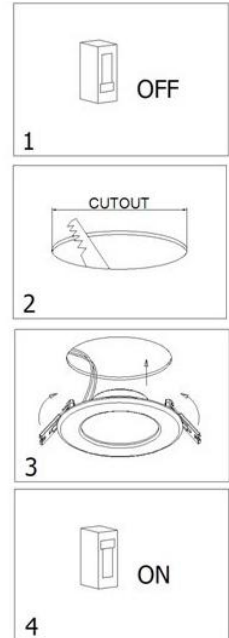

<b>V</b>	170-250V 50Hz
	20000H
<b>Ra</b>	≥ 80
<b>PF</b>	> 0.5
<b>IP</b>	20


	160°
<b>Hg</b>	<0.1%
<b>EEI</b>	A+ / A
	optimal Ta=-20°~40°

**DAY LIGHT** **6000K**    **NATURAL WHITE** **4000K**    **WARM WHITE** **3000K**


PACKING 1pc/colour box

#### Size


E6 SLIM DOWN LIGHT 16W

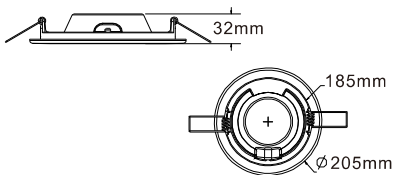

E6 SLIM DOWN LIGHT 18W

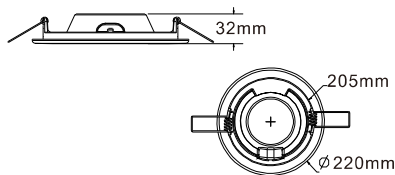

E6 SLIM DOWN LIGHT 20W

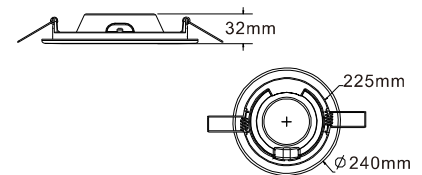

product code	Model	K	W	LM	mA	Chip QTY	PCS CTN	kWh/1000h	Certification
001420	E6 SLIM DOWN LIGHT	6000K	16	1230	180	78	10	16	CE, ROHS
001154	E6 SLIM DOWN LIGHT	4000K	16	1180	180	78	10	16	CE, ROHS
001437	E6 SLIM DOWN LIGHT	3000K	16	1130	180	78	10	16	CE, ROHS
001444	E6 SLIM DOWN LIGHT	6000K	18	1380	240	88	10	18	CE, ROHS
001468	E6 SLIM DOWN LIGHT	4000K	18	1300	240	88	10	18	CE, ROHS
001451	E6 SLIM DOWN LIGHT	3000K	18	1230	240	88	10	18	CE, ROHS
001369	E6 SLIM DOWN LIGHT	6000K	20	1450	240	100	10	20	CE, ROHS
001383	E6 SLIM DOWN LIGHT	4000K	20	1400	240	100	10	20	CE, ROHS
001376	E6 SLIM DOWN LIGHT	3000K	20	1370	240	100	10	20	CE, ROHS



#### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.

# LED LAMP

## E6 SERIES


### SLIM DOWNLIGHT

www.aigostar.com




## SPECTRUM >>>


E6 SLIM DOWN LIGHT 16W 6000K

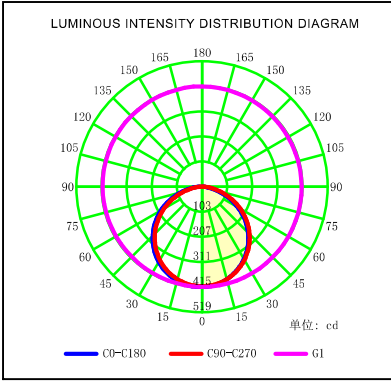


E6 SLIM DOWN LIGHT 16W 4000K

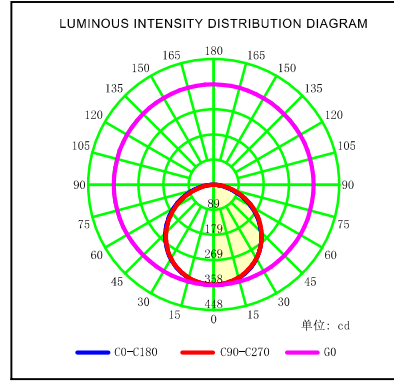


E6 SLIM DOWN LIGHT 16W 3000K

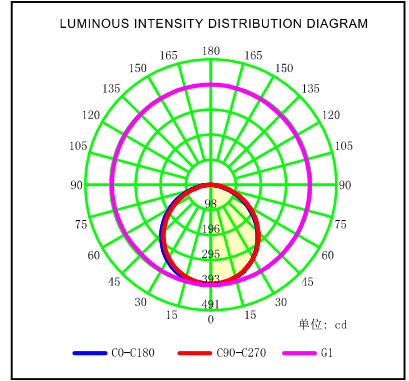


E6 SLIM DOWN LIGHT 18W 6000K

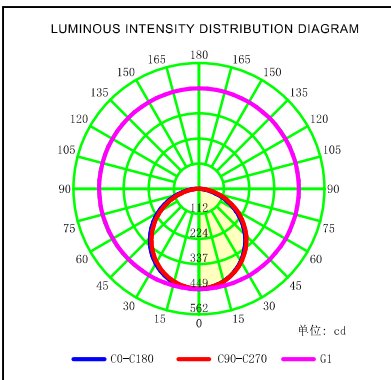


E6 SLIM DOWN LIGHT 18W 4000K

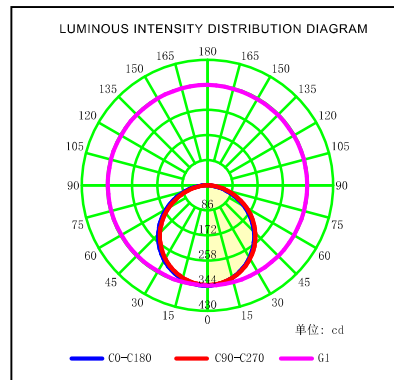


E6 SLIM DOWN LIGHT 18W 3000K

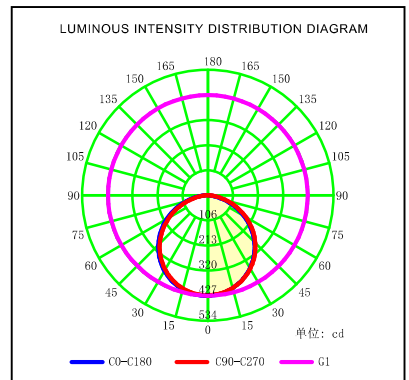


E6 SLIM DOWN LIGHT 20W 6000K

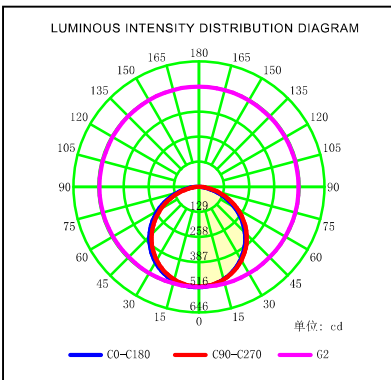

E6 SLIM DOWN LIGHT 20W 4000K

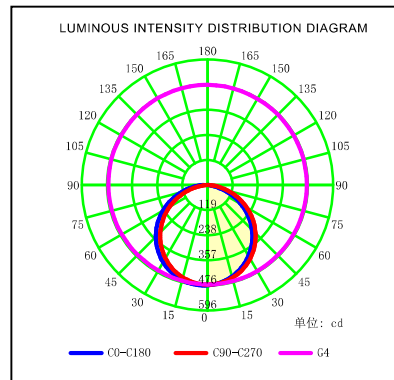

E6 SLIM DOWN LIGHT 20W 3000K

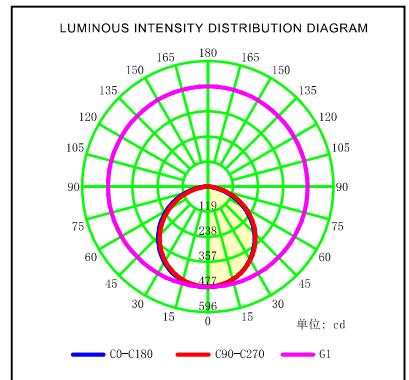

### warning

- Power should be cut off before installation, maintenance or inspection.
- Please install and use the light strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.