

LED LAMP TABLE LAMP

www.aigostar.com




WHITE



RED



BLACK

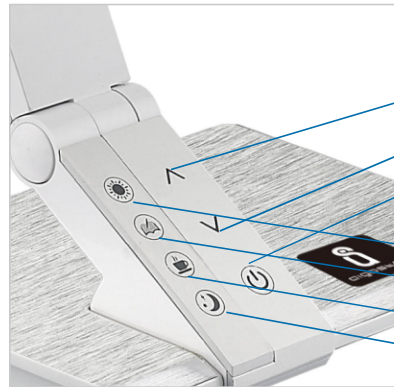

Name	Funtion
Max	touch sensor the light to be week brightness
Min	touch sensor the light to be strong brightness
ON/OFF	ON / OFF

Name	Color temperature	Power
white light	6300K±300K	7-8W
Book/working	5000K±200K	9-10W
coffee/resting	4300K±200K	5-6W
night light	3300k±200K	3-4W


DAY LIGHT & WARM WHITE
6000K-3300K

PACKING 1pc/colour box
PCS/CTN 12



V	AC100-240V 50/60Hz	On/Off	≥25,000
50000H		Beam angle	120°
Ra	≥ 80	Chip Model	5730
PF	> 0.5	Hg	0%
IP	20	optimal Ta	-20°~50°

Size



product code	Model	K	W = \uparrow w	LM	mA	Chip QTY	EEI	kWh/1000h	Certification	
178697	TL03-B 10W B	6000K~3300K	10	60	540	550	28	B	20	CE, ROHS
178673	TL03-R 10W B	6000K~3300K	10	60	560	550	28	B	20	CE, ROHS
178680	TL03-W 10W B	6000K~3300K	10	60	600	550	28	B	20	CE, ROHS

Installation and Precautions

★Please use indoor only, do not use the product outdoors, or in locations with high humidity like a bathroom as this is not waterproof. ♦Use condition:temperature -25°C to 40°C relative humidity less than 98%. ♦Connect the DC plug into DC socket and then connect the LED adapter into power. ♦Do not disassemble or tamper with the adapter, or attempt to replace any parts. ♦Please unplug the adapter if it will not be used for a long period of time. ♦Unplug immediately if the exception occurs (such as: smoke, odor).