

LED LAMP LED STRIP LIGHT

www.aigostar.com




WITH REMOTE CONTROLLER

DIGITAL

PACKING 5m/roll 1pc/blister
PCS/CTN 20

V	DC 12V
	30000H
IP	44
On/Off Cycles	≥ 15,000

Size

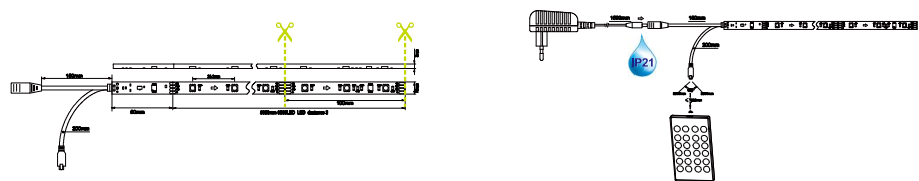

Product code	Model	Cable	Lm	EEI	Certification
178932	SL03-D	5M	600	A	GS, CE, ROHS



Installation and Precautions

- after you install one 5m led strip, the connected lines of another led strip "should be connected to the Switching Power Supply. to prevent the lighting deviation" because of the low Voltage.
- You should choose the Switching Power Supply according to the quantity of the connected LED strip, and reserve 20% to prevent to damage the Switching Power Supply.
- the led strip can not be forced down. ♦please don't damage the connected lines in the PCB when you install.
- Avoid dragging the LED strip on the ground, prevent Scratching or Damaging the prevent layer.
- please pay attention to the voltage standard. pay attention to the "+" "-"terminal.
- if you connect many led strip, please keet them in parallel, if keep them Series connection will cause voltage reduce and the lighting of the led strip loose stable.
- the Pu of the LED strip surface is corrosive, if the PU surface be damaged during the construction, it is out warranty scale.